
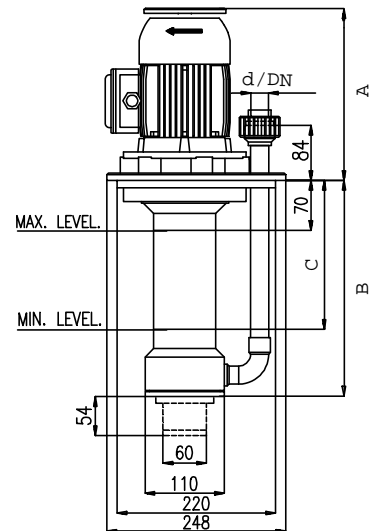


**OPTIONS**

- FIP Union, Hose adaptor
- CPVC union end for CPVC pipework
- Suction extension pipe max 500mm
- Overload switch
- Customised Mountingplate
- + Cartridge- or discfilters

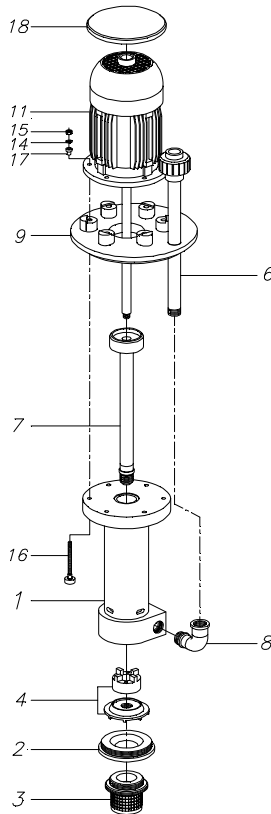

Type	kW	HP	Net kg
D110-0.18-300-PP	0.18	1/4	10
D110-0.25-300-PP	0.25	1/3	11
D110-0.37-300-PP	0.37	1/2	12
D110-0.55-300-PP	0.55	3/4	13
D110-0.37-350-PP	0.37	1/2	12
D110-0.55-350-PP	0.55	3/4	13

Type	kW	HP	Net kg
D110-0.18-300-PP	0.18	1/4	10
D110-0.25-300-PP	0.25	1/3	11
D110-0.37-300-PP	0.37	1/2	12
D110-0.55-300-PP	0.55	3/4	13
D110-0.37-350-PP	0.37	1/2	12
D110-0.55-350-PP	0.55	3/4	13

Dimensions in mm			
A	B	C	d / DN
225	300	207	d25DN20
225	300	207	d25DN20
245	300	207	d25DN20
245	300	207	d32DN25
245	350	257	d25DN20
245	350	257	d32DN25

All 3 phase motors (IP55) have multi voltage capability:  
Single phase motors on request

50 Hz (2900RPM)  $\lambda/\Delta$  346-440 / 200-254 V (±5%)  
60 Hz (3400RPM)  $\lambda/\Delta$  346-480 / 200-277 V (±5%)

